

## Tutorial for installing the included rubber strap on the Cave Dweller

### Items needed:

Spring-bar tool

Masking tape (optional)


Patience

After removing the bracelet I recommend using tape to mask off the lugs to protect them from accidental scratches. (picture 1)



Picture 1

There are two holes drilled into the lugs. (picture 2)

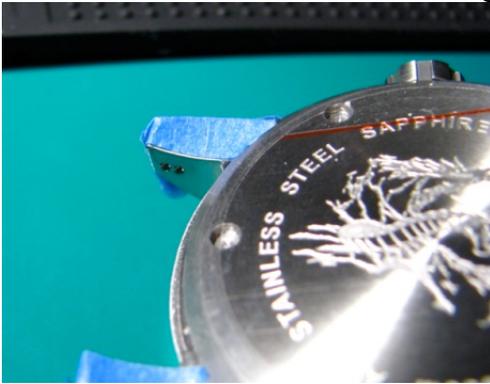

Picture 2

The outer holes are for the bracelet the inner holes are for the rubber strap. Note the rubber strap will fit into the holes meant for the bracelet but the strap will be a little loose against the case and you will be able to swivel the strap away from the case. (picture 3)




Picture 3

Note the ridge in the end of the strap. (picture 4)



Picture 4

This must rest on top of the ridge on the case. (picture 5)

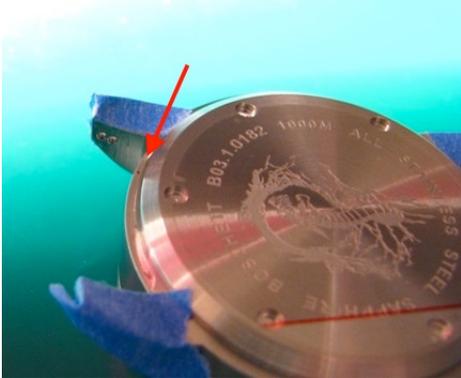

Picture 5

Now here's a handy tip. Make a mark on the tape indicating where the proper holes are. (picture 6)



Picture 6


Holding the strap up at an angle (picture 7) line up one side and slide the strap in so the spring bar goes into the proper hole. This one side should pop in. (picture 8) Using the spring-bar tool again gently put the other side inside the lug. You will see that this other side is not yet in. (picture 9)



Picture 7




Picture 8

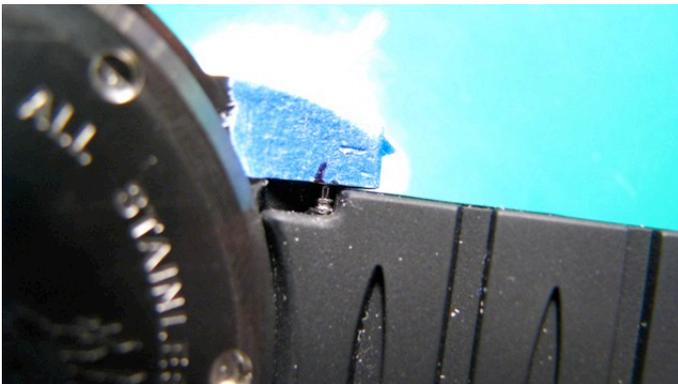


Picture 9

Turn the watch around and place the strap on the surface. Now here it helps to apply a little pressure down and to the left (refer to the orientation in the picture) so that the strap is being pushed against the case. (picture 10)

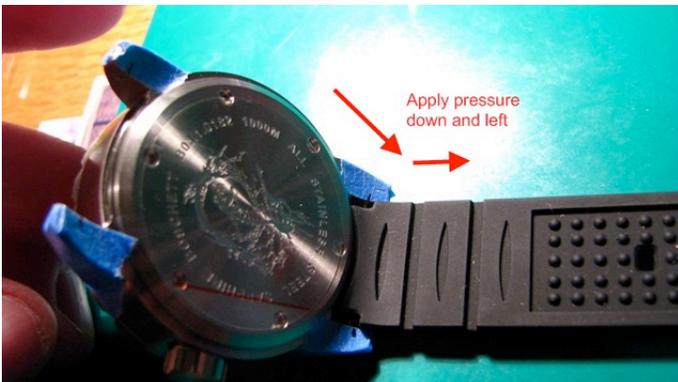

Picture 10

While applying pressure use the spring-bar tool to maneuver the spring-bar into the second hole. (picture 11)

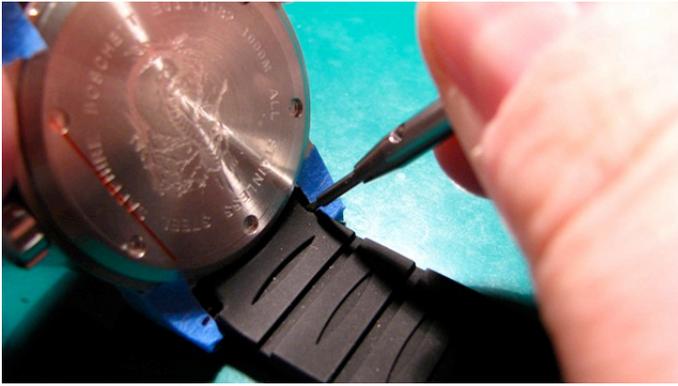

Picture 11

Repeat for the other side.

Viola! (picture 12)



Picture 12